


ATTACHMENT 1


NAT Testing Algorithm for Whole Blood

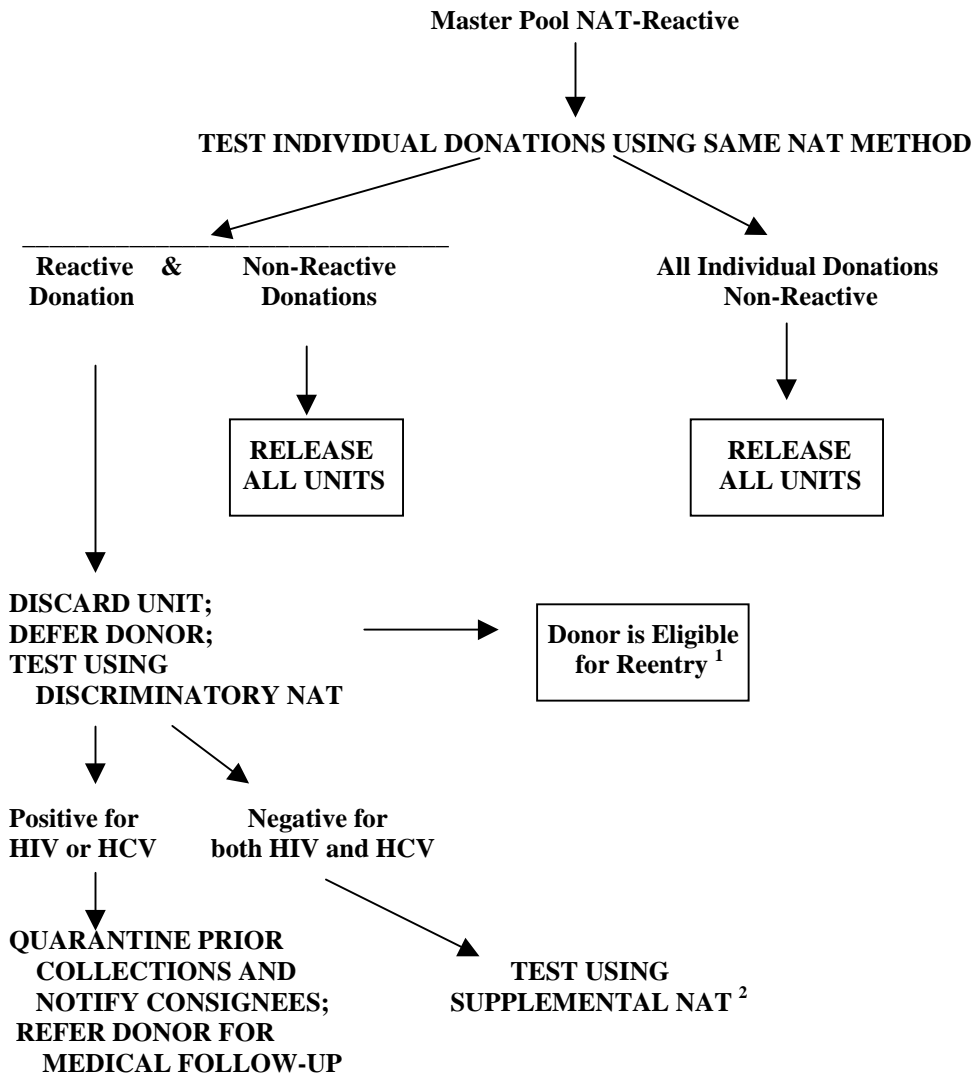

¹ Unless Supplemental NAT (below) is Positive (in which case, DEFER DONOR PERMANENTLY).

² Using a Supplemental NAT that is validated for use with individual donations.

NAT Testing Algorithm for Source Plasma and Whole Blood Establishments Desiring to Test Subpools

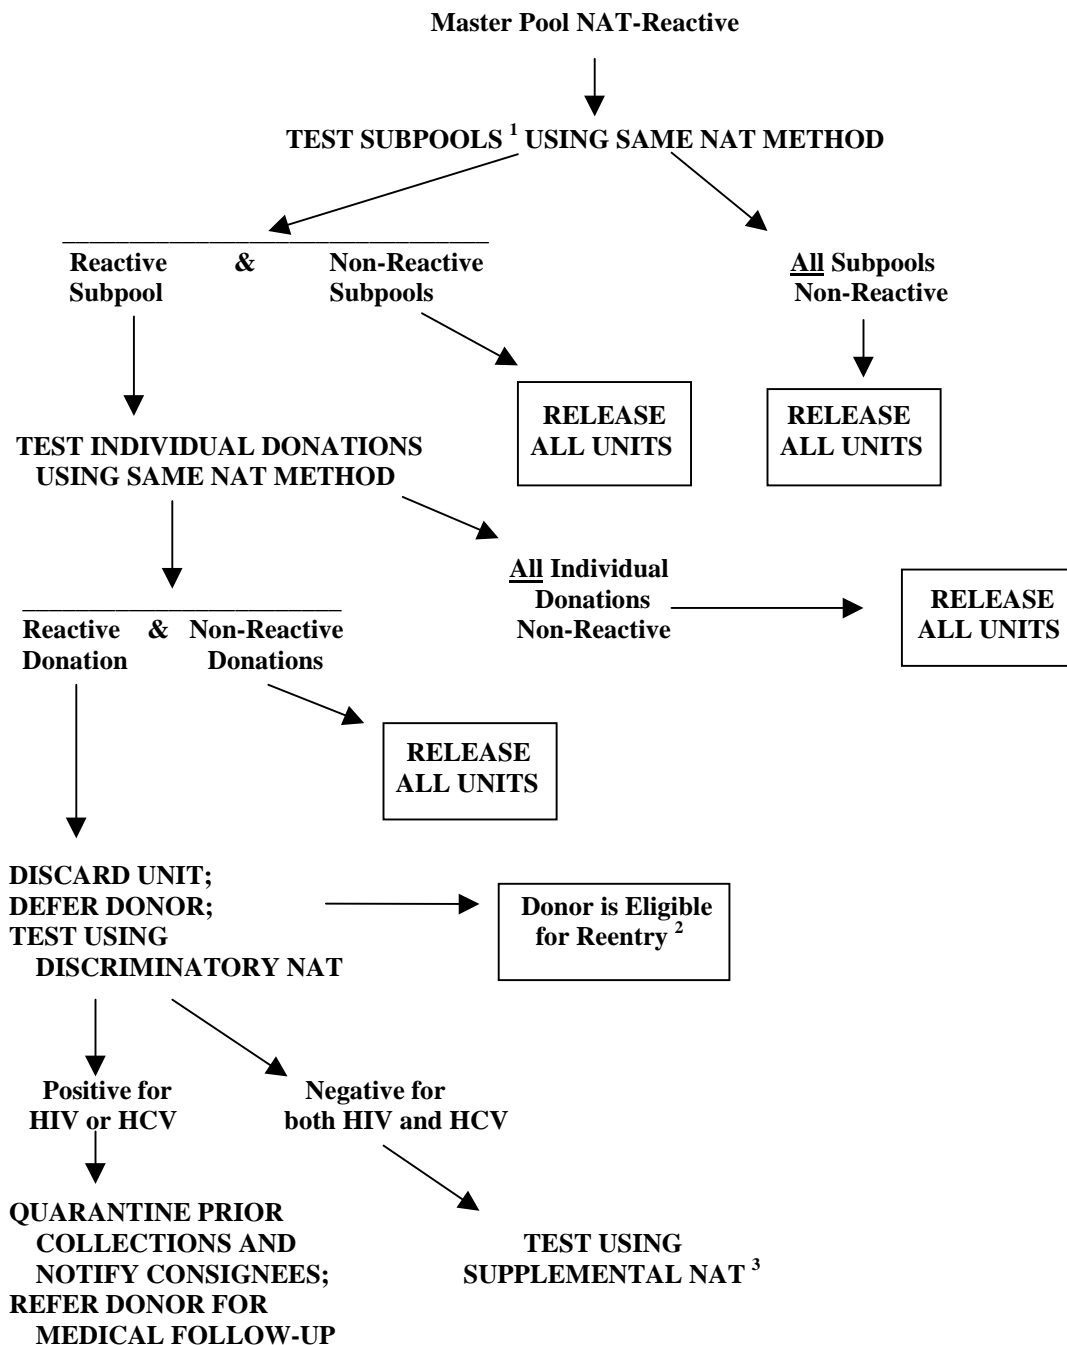

¹ Can be several layers of deconstruction using original or freshly pooled Subpools.

² Unless Supplemental NAT (below) is Positive (in which case, DEFER DONOR PERMANENTLY).

³ Using a Supplemental NAT that is validated for use with individual donations.